





# DNH

## VES-661(T)x2

Morrison's Public Address  
Phone: 0407442822  
Email: sales@morrisonssav.com.au

ISO 9001 CERTIFIED

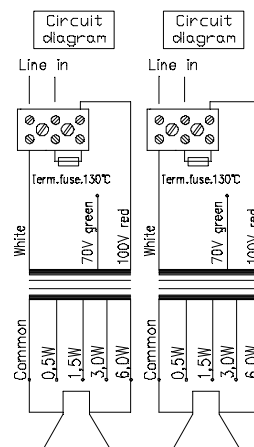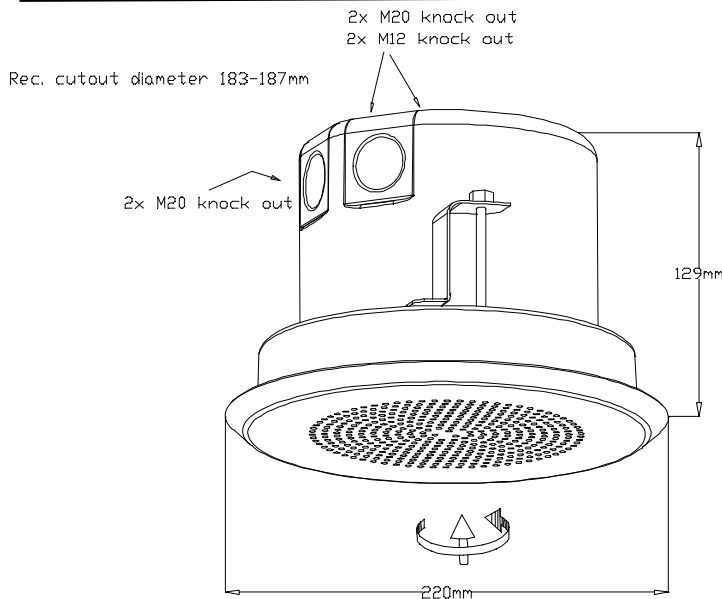


BS5839 Part 8 VA compliant

70/100 volt combined transformer  
Primary connections

White : Green 70 V  
White : Red 100 V

Secondary nominal tapings

C : 6,0W	6,0 W
C : 3,0W	3,0 W
C : 1,5W	1,5 W
C : 0,5W	0,5 W



Sound pressure levels at 1W/1m A+B system

SPL vs Freq



Specifications

Material / Color	Steel / White RAL 9010
Mounting	3 screws
Termination	Ceramic terminals
Weight	2,0 kg
IP-rating	N/A
Max. / min. amb. temp	110°C / -20°C
Standard version	100 V transformer
Rated / max. power	6 W / 2x6 W
SPL 1W/1m	93 dB / 96dB
SPL rated power	99 dB / 102 dB
Effective freq. range	240 – 13000 Hz
Dispersion (-6dB) 1kHz / 4kHz	N/A
Options	Impedances, colors, labels

### Installation, Operation and Maintenance Procedures

- Two separate loudspeakers, two transformers and two terminals (A + B system).
- A + B system should be connected the same way so that systems are in phase.
- Install the steel box into the cut-out hole turning the screws connected to the three hooks, screw clockwise until the ring is fixed to the ceiling.
- Lead cable through box and connect to terminal.
- If 70V, replace red cable with the green cable in the terminal.
- Turn the grille gently clockwise within the ring until it stops.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Transformer compliant to British standard 5839.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.

DNH reserves the right to alter specifications without notice

