





DNH
HEAD OFFICE, NORWAY

DSP-25EExmN(T)

Morrison's Public Address
Email: sales@morrison sav.com.au
Phone: 0407442822
Fax: 08 9459 2869

ISO 9001 CERTIFIED

All outside nuts and screws
in stainless steel.

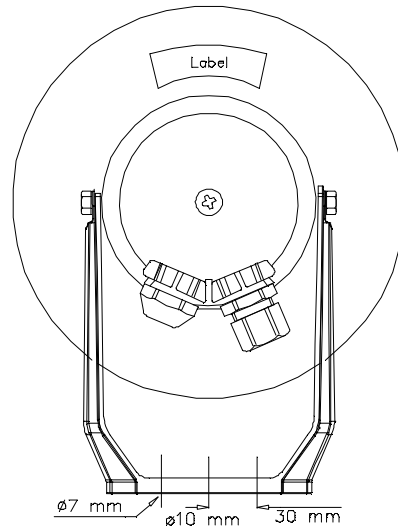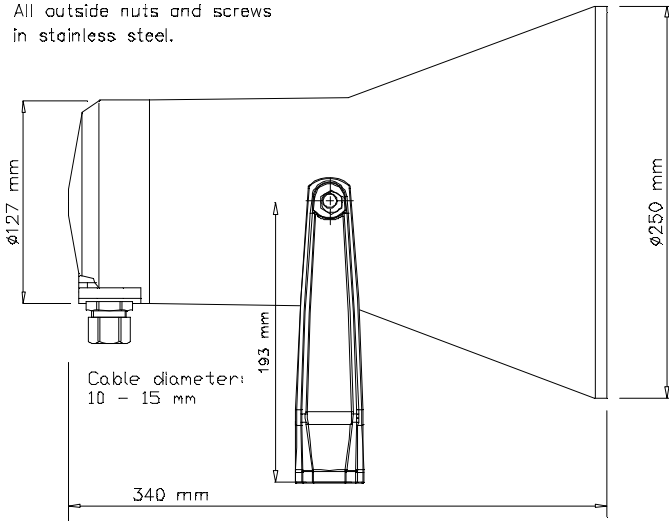

Transformer:
100 V line (optional 70V, 50V)

Primary nominal tapings:

- 1 : 2 25,0 W
- 2 : 3 12,5 W
- 3 : 4 6,0 W
- 1 : 3 4,0 W
- 2 : 4 2,0 W
- 1 : 4 1,0 W


- 1=Red 2=Yellow
- 3=Green 4=Blue

- 1 x M20 plastic EEx ATEX cable gland and
- 1 x M20 EEx ATEX blanking plug

Certified by / Certification code / Number: NEMKO / Ex d e mb IIB+H₂/IIC T5 Gb / 10ATEX1053
Certified by / Certification code / Number: NEMKO / Ex tb IIIC T89°C / 10ATEX1053

II 2G
II 2D

SPL at 1W/1m sine wave

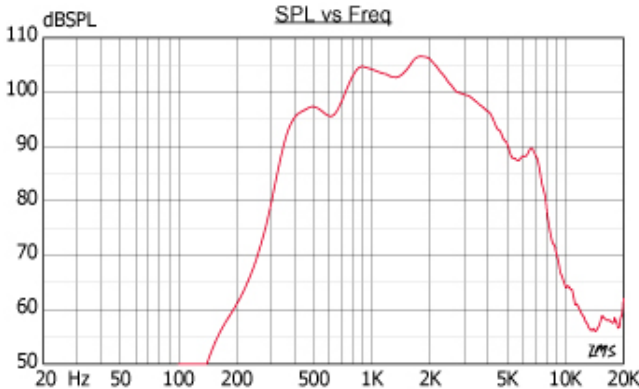

Material / Color.....	Anti-static polyamide / Black	IIB	IIC
Mounting	Bracket		
Termination	e-chamber, screw terminals		
Weight	4,0 kg		
IP-rating (e-chamber)	66		
Max / min amb temp.....	55 °C / -53 °C		
Rated / max power	25 W / 25 W		
SPL 1W/1m	106 dB	102 dB	
SPL rated power	117 dB	113 dB	
Effective freq range	370 – 7000 Hz	400-7000	
Dispersion (-6dB) 1kHz / 4kHz	110° / 30°	100° / 30°	
Options.....	Impedance, moulded permanent cable, labels		

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received. Fasten bracket with 2-3 screws.
- To change the position of the loudspeaker, please adjust the bracket (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Use only certified/specified cable glands and blanking plugs.
- Do not open loudspeaker when energized.
- Fasten lid with a torque of 1 - 2 Nm.
- This loudspeaker is supplied with a 2 year warranty against defective materials and workmanship.



DNH reserves the right to alter specifications without notice

Rev. 18.04.2011