



ISO 9001 Certified

DNH AS

**N-3770 Kragerø
NORWAY**

Phone: (47) 35 98 56 00
Fax: (47) 35 98 56 10
E-mail: dnh@dnh.no
Web-site: www.dnh.no


DNH WW Ltd. Phone: (44) 1908 275 000
England Fax: (44) 1908 275 100
E-mail: dnh@dnh.co.uk

DNH France Phone: (33) 1 5380 0276
Fax: (33) 1 4588 1594
E-mail: etienne@dnh.no


DNH GmbH Phone: (49) 040 6569 30 -0
Germany Fax: (49) 040 6569 30 -30
E-mail: dnh@dnh.de

DNH Speakers Inc. Phone: (1) 484 494 5790
USA Fax: (1) 484 494 5793
E-mail: dnh@dnhspeakers.com

AQUA-30

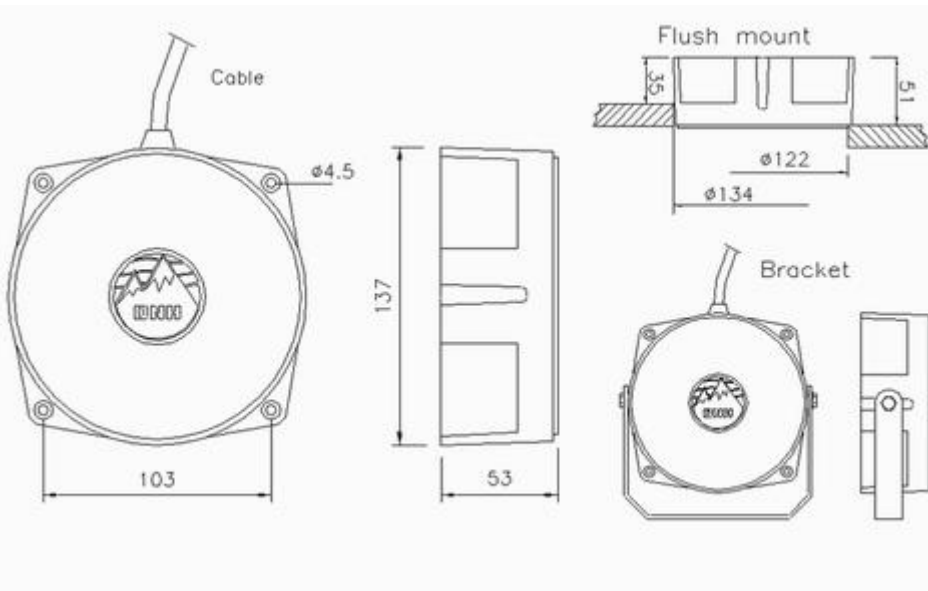

1W/1m Pink Noise 1/3 octave bands 2m below surface.

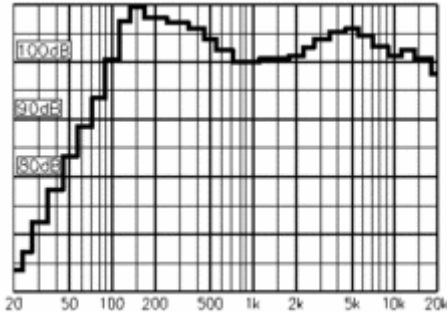

Material/Colour	ABS/ NCS 1070-B, (Blue)
Mounting	4screws
Termination	Cable,5 m
Weight	2.2 kg
IP-rating	68
Max. / min. amb. temp	90°C / -20°C
Rated / max. power	20W / 30 W
SPL 1W/1m	105 db
SPL rated power	118 db
Effective freq. range	80- 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	180° / 180°
Options	Impedance, color, label

Installation, Operation and Maintenance Procedures

- | Use 4 screws for mounting on wall, alternative flush mounting.
- | When mounting with optional bracket, use the slit on each side to connect the bracket to the loudspeaker.
- | For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- | Cable termination code: Green/yellow: Ground Brown: (+). Blue: (-)
- | Please exercise care when installing submerged. This loudspeaker generates very high sound pressures even when driven at low power.
- | This loudspeaker is supplied with a 2 year warranty against defective workmanship.

