

ACT-32TC Rechargeable Bodypack Transmitter

Key Features

- Lightweight, compact size with sturdy plastic housing.
- On the top features mute switch, mini-XLR connector and antenna.
- Backlit LCD displays various parameters and status.
- Innovatively designed battery cover allows easy access to operate buttons and prevents accidental operation.
- Mute button with remote-control jack for easy activation of mute function.
- Stable PLL circuits. Automatically synchronized with the receiver's frequency by MIPRO's patented ACT™ function.
- Can directly match to high-low input impedance for microphone or guitar without switching.
- Mini-XLR input with secure screw lock connector for lavalier / headworn mics and guitar.
- Adjustable belt clip allows wearing transmitter in up or down position.
- Transmitter has high-efficiency circuitry design. The included single rechargeable lithium battery can be easily removed or interchanged for charging. The intelligent battery charger maintains a high charge capacity for up to 600 charge cycles for cost saving and is environmentally friendly.

Microphones


MU-13	Single-sided Earworn Microphone (beige)
MU-23	Omni-directional Headworn Microphone (beige, fixed connector)
MU-23d	Omni-directional Headworn Microphone (beige, detachable cont)
MU-210	Uni-directional Headworn Microphone (beige, fixed connector)
MU-210d	Uni-directional Headworn Microphone (beige, detachable cont.)
MU-53L MU-53LS	Uni-directional Lavalier Microphone (black beige)
MU-55L MU-55LS	Omni-directional Lavalier Microphone (black beige)
MU-53HN MU-53HNS	Uni-directional Headworn Microphone (black beige)
MU-55HN MU-55HNS	Omni-directional Headworn Microphone (black beige)

Accessories

ASP-30	Neoprene Sports Pouch
MJ-70	Remote Mute Switch
MU-40G	Instrument Cable
MP-20	Battery Charger
MP-80	3-in-1 Transmitter Charging Station
TC-18	Transmitter Shielding Storage Case

Technical Specifications

Frequency Range	UHF 480 – 934 MHz
Bandwidth	24 MHz
Oscillation Mode	PLL Synthesized
Channel Set-Up	ACT Sync
RF Output Power	10 mW / 50 mW (switchable)
Deviation	< ±40 kHz
Spurious Emission	≤ -55 dBc
LCD Display	Group, Channel, Frequency, AF gain, Frequency band, RF power, Mute mode, Lock status, Battery status and error codes
Max. Input Level	0 dBV
Mute Connector	Optional MJ-70 remote mute switch
Battery	1 ICR-18500 rechargeable lithium battery
Current Consumption	High Power: approx. 125 mA; Low Power: approx. 100 mA
Operating Time	Min. 13 hours
Dimensions (W × H × D)	63 × 70 × 25 mm / 2.5 × 2.8 × 1.0"
Net Weight	Approx. 76 g / 2.7 oz

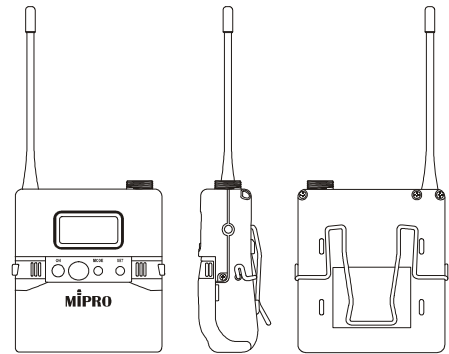

Morrison's Public Address
 Phone: 08 94931196
 Email: sales@morrison sav.com.au



MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
 Tel: +886.5.238.0809 | Fax: +886.5.238.0803
 www.mipro.com.tw | mipro@mipro.com.tw