




DNH

HSS-15(T)



Morrison's Public Address
Phone: 08 94931196
Email: sales@morrisonssav.com.au

ISO 9001 CERTIFIED

CIRCUIT DIAGRAM
Ohm




CIRCUIT DIAGRAM
TRANSFORMER

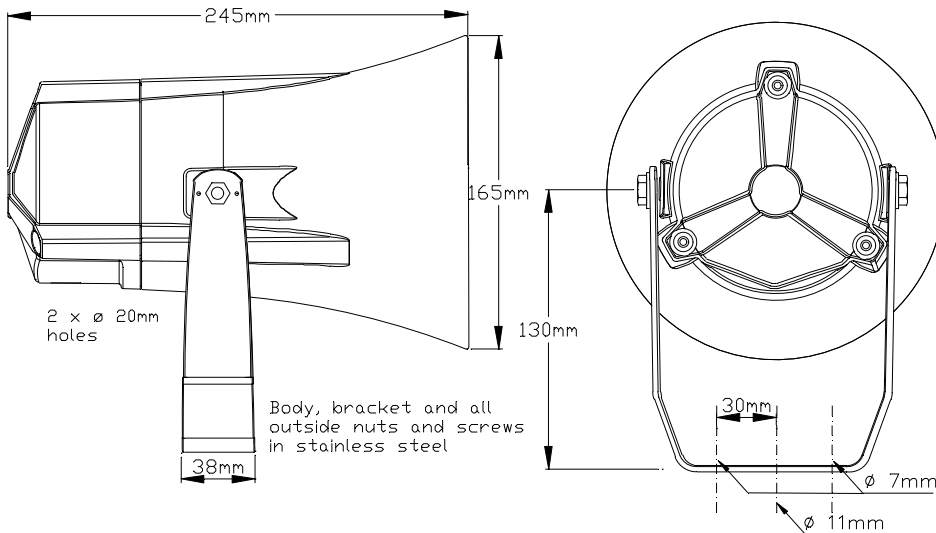

70/100 volt combined transformer	
Primary connections	
White : Green	70 V
White : Red	100 V
Secondary nominal tapings	
C : 1	15,0 W
C : 2	7,5 W
C : 3	4,0 W
C : 4	2,0 W

Sound pressure levels at 1W/1m RAV-67

SPL vs Freq

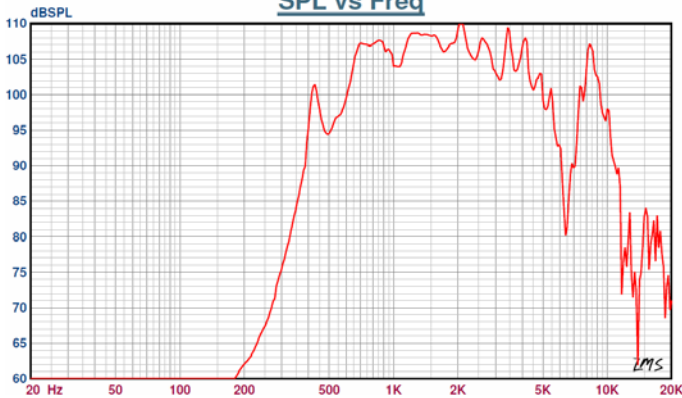

Specifications

Material / Color	Stainless steel 316
Mounting	U Bracket
Termination	Inside screw terminals
Weight w/transformer	6,5 kg
IP-rating	67
Max. / min. amb. temp	180°C / -55°C
Rated / max. power	15 W / 20 W
SPL 1W/1m	107 dB
SPL rated power	118 dB
Effective freq. range	380 – 90000 Hz
Options	Impedances, colors, labels

Installation, Operation and Maintenance Procedures

- Fasten the bracket to wall/ceiling with three screws.
- Remove lid by three screws. Lead cable through cable gland (not provided) and connect to terminal 70V or 100V.
- Select power in the transformer as required.
- Screw lid back into place, three screws with a torque of 2 Nm to assure the IP rating.
- To change the position of the loudspeaker, please adjust the bracket (by loosening / tightening the screws) as required.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a two years warranty against defective workmanship.

DNH reserves the right to alter specifications without notice

